

SPA-40-47-10 Solid State Power Amplifier

(40GHz - 47GHz, 10W)

Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protection
- Optional overdrive protection
- CE, RoHS certification



Overview

Saluki SPA-40-47-10 is a solid-state RF power amplifier with an output frequency of 40GHz to 47GHz and an output power of 10W. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

Technical Specifications


| SPA-40-47-10 | | | |
|------------------------|---------------|-------------------------|-------------------|
| Frequency Range | 40GHz - 47GHz | Input Power | 0dBm (max.) |
| Output Power | 10W (min.) | Harmonic | -20dBc (typ.) |
| Gain | 40dB (min.) | Background Noise | -40dBm/MHz (max.) |
| Gain Flatness | ± 4dB (max.) | Spurious | -60dBc (max.) |
| Adjustable Gain | 15dB (max.) | Input VSWR | 1.5:1 (typ.) |
| Impedance | 50 ohm | VSWR Protection | 3:1 |

SPA-40-47-10 Solid State Power Amplifier

(40GHz - 47GHz, 10W)

| | | | |
|--------------------------------|----------------|------------------------------|-------------------------|
| Input Port | 2.4mm (female) | Output Port | WR22 |
| Monitoring Port | 2.4mm (female) | Cooling Type | Air cooling |
| Communication Interface | RS485, LAN | Power Supply | AC 220V±10%, 50/60Hz |
| Dimension | 19", 3U | Operating Temperature | 0 - 50°C |

Outline Structure

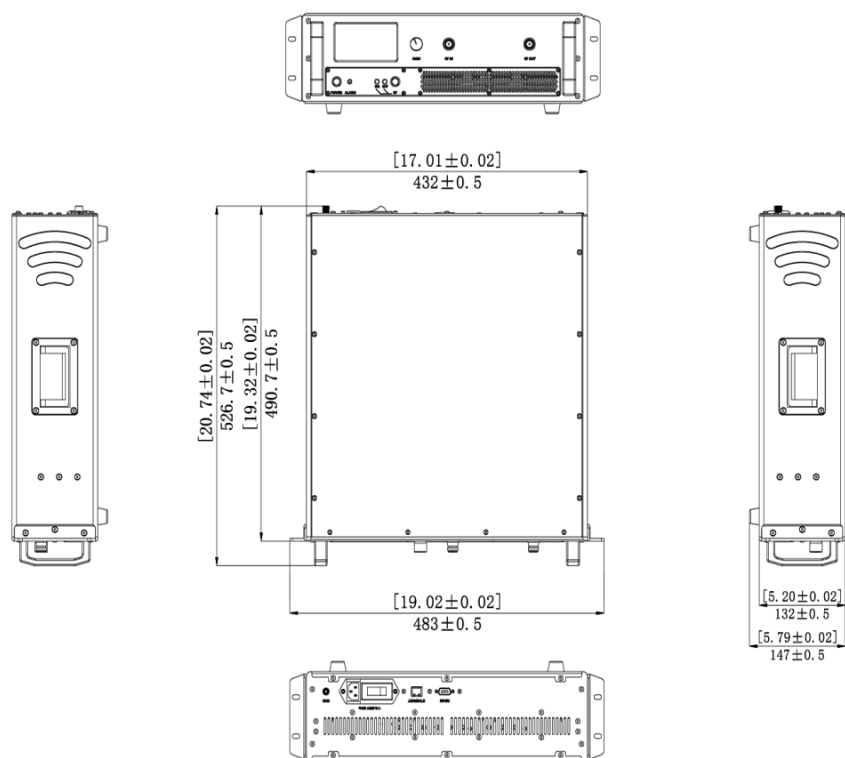

Options

| Module No. | Item |
|------------|----------------------|
| 001 | Overdrive protection |
| 002 | GPIB interface |

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.