



# RF-LAMBDA

The power beyond expectations

**RLNA00M45GA**

## Ultra Wide Band Low Noise Amplifier 0.01 - 45GHz



### Features

- Ultra Wideband Low Noise Amplifier
- Gain: 37dB
- P1dB: +23dBm Typical
- Noise Figure: 4dB Typical
- Supply Voltage: +12V

### Typical Applications

- Military & Defense Applications
- Wireless Infrastructure
- Test and Measurement

Electrical Specifications,  $T_A=25\text{ }^{\circ}\text{C}$ ,  $V_{CC}=+12\text{V}$

Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range	0.01 ~ 20			20 ~ 45			GHz
Gain		37			34		dB
Gain Variation Over Temperature		0.5			0.5		dB
Noise Figure		5.0			6.0		dB
Input VSWR		1.35			1.55		: 1
Output VSWR		1.38			1.38		: 1
Output 1dB Compression Point (P1dB)		23.5			20		dBm
Saturated Output Power (Psat)		24.5			23		dBm
Output Third Order Intercept (IP3)		28.5			27		dBm
Supply Current ( $V_{CC} = +12\text{V}$ )		435			435		mA
Bias Voltage		12			12		V
Isolation S12		70			65		dB
Maximum Input Power		P1dB - Gain			P1dB - Gain		dBm
Weight	75						g
Impedance	50						Ohms
Input / Output Connectors	2.92 – Female						
Finish	Gold Plated						
Material	Aluminum / Copper						

Ultra Wide Band Low Noise Amplifier 0.01 - 45GHz



Absolute Maximum Ratings	
Supply Voltage	+12.5 VDC
Maximum Input Power	P <sub>1dB</sub> - Gain

Note: Maximum RF input power is defined to protect the amplifier from damage. Input power may be increased at the users own risk to achieve the full power of the amplifier. Please reference gain and power curves and monitor the temperature.

Biasing Up Procedure	
Step 1	Connect input and output to 50 Ohm source and load with in band return loss better than 10dB.
Step 2	Connect Ground Pin
Step 3	Connect Bias Voltage
Power OFF Procedure	
Step 1	Turn off Bias Voltage
Step 2	Remove RF connections
Step 3	Remove ground connection

### Environmental Specifications and Test Standards

Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+55°C (Case Temperature less than 85°C)
Storage Temperature		-50°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	MIL-STD-883	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)		MIL-STD-883 (For Hermetically Sealed Units)



Ordering Information	
Part Number	Description
RLNA00M45GA	Ultra Wide Band Low Noise Amplifier 0.01 - 45GHz

### Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

#### Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing.

Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.





# RF-LAMBDA


The power beyond expectations

RLNA00M45GA


## Wideband S-Parameters

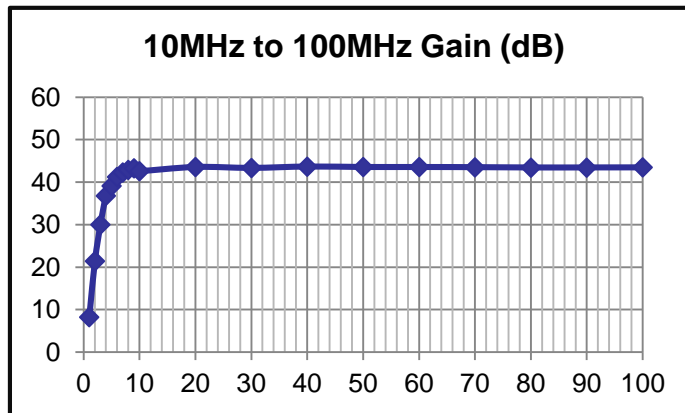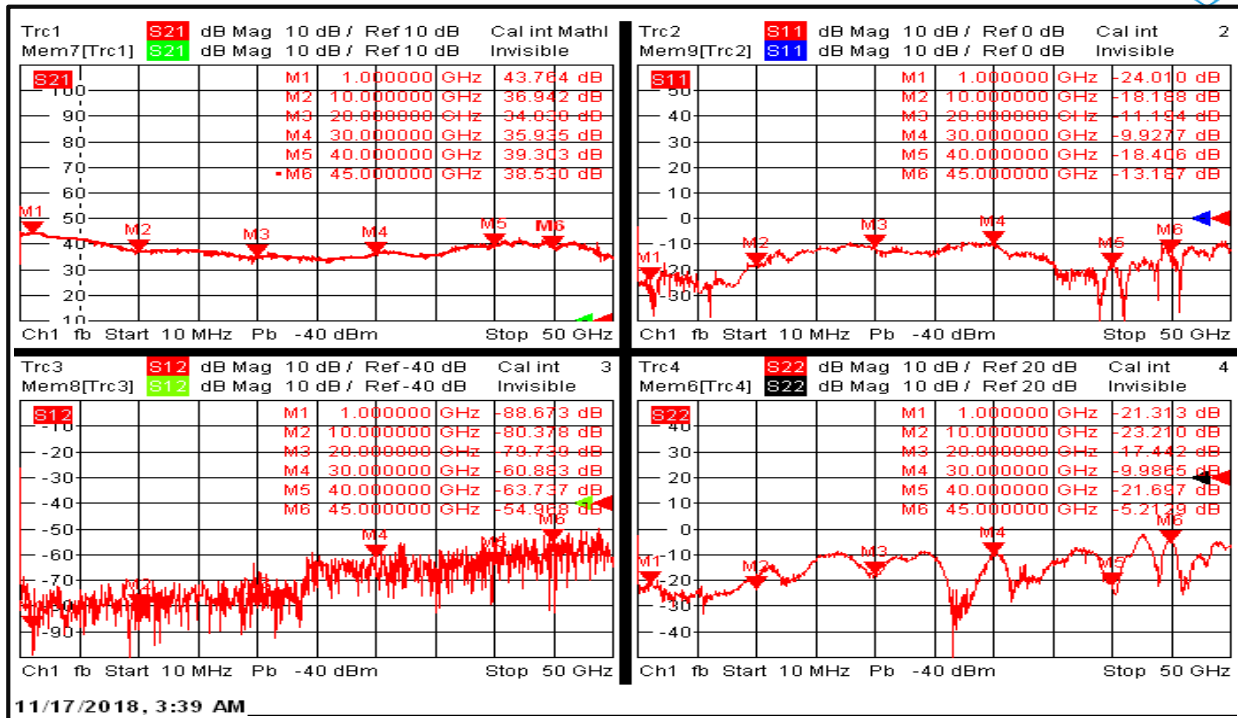

## Gain vs. Pout

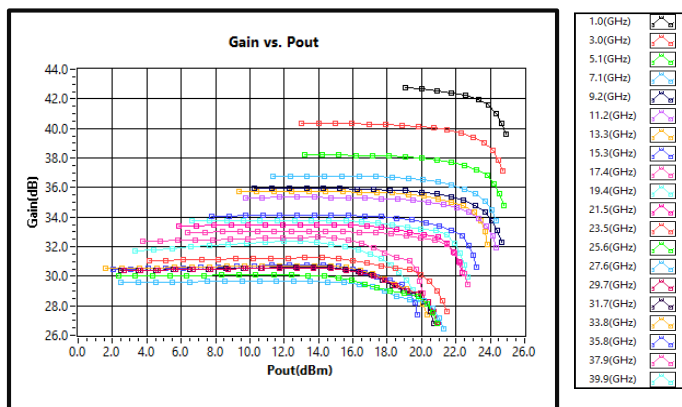

## P1dB vs. Frequency

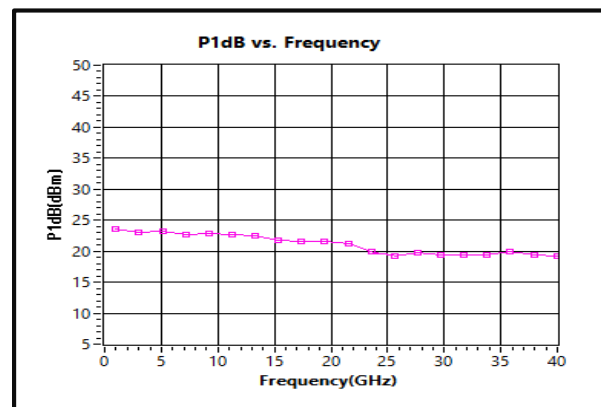

Ultra Wide Band Low Noise Amplifier 0.01 - 45GHz




# RF-LAMBDA

The power beyond expectations


**RLNA00M45GA**

**Ultra Wide Band Low Noise Amplifier 0.01 - 45GHz**


**OIP3 vs. Frequency**

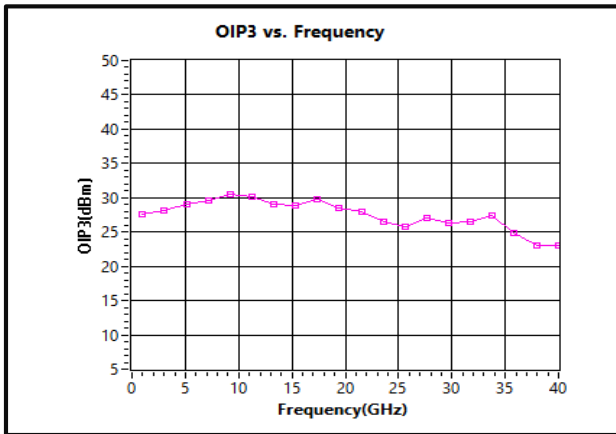


**2<sup>nd</sup> Harmonic Wave vs. Pout**

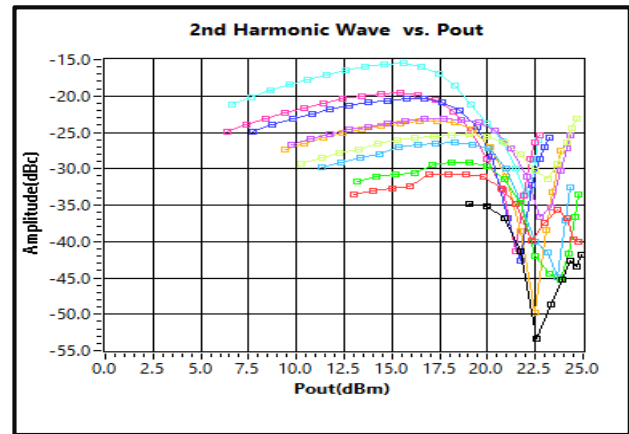


**3rd Harmonic Wave vs. Pout**

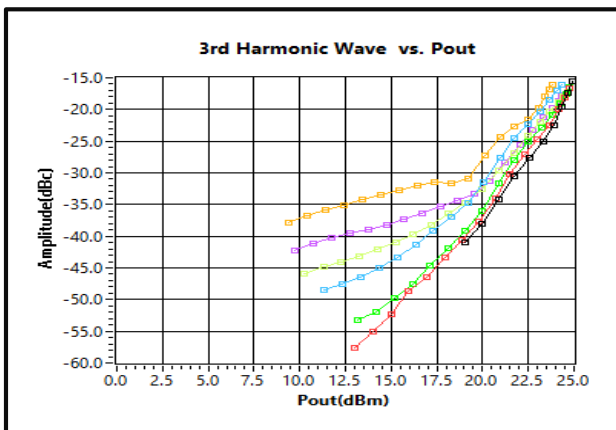

**4th Harmonic Wave vs. Pout**

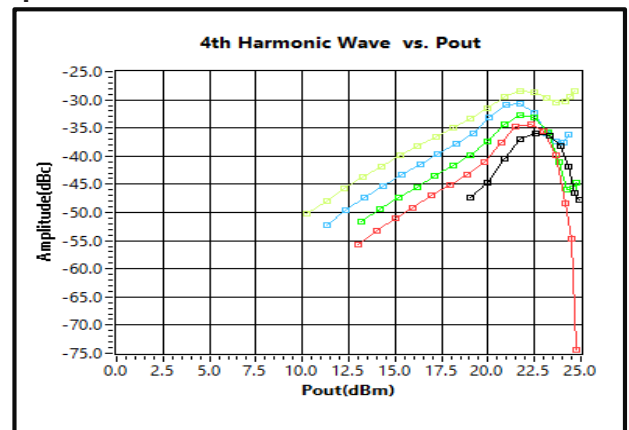

**Current vs. Pout**

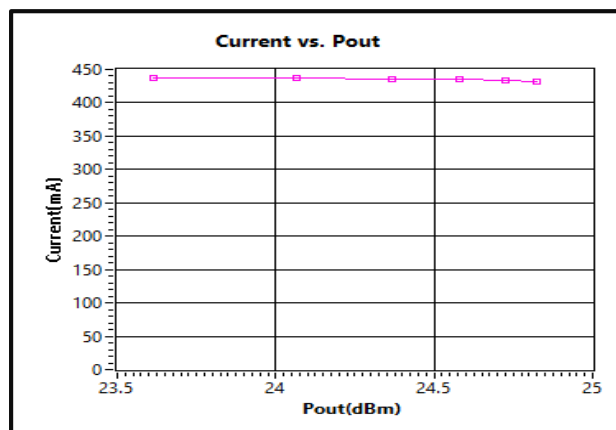




# RF-LAMBDA

The power beyond expectations

**RLNA00M45GA**

## Noise Figure vs. Frequency

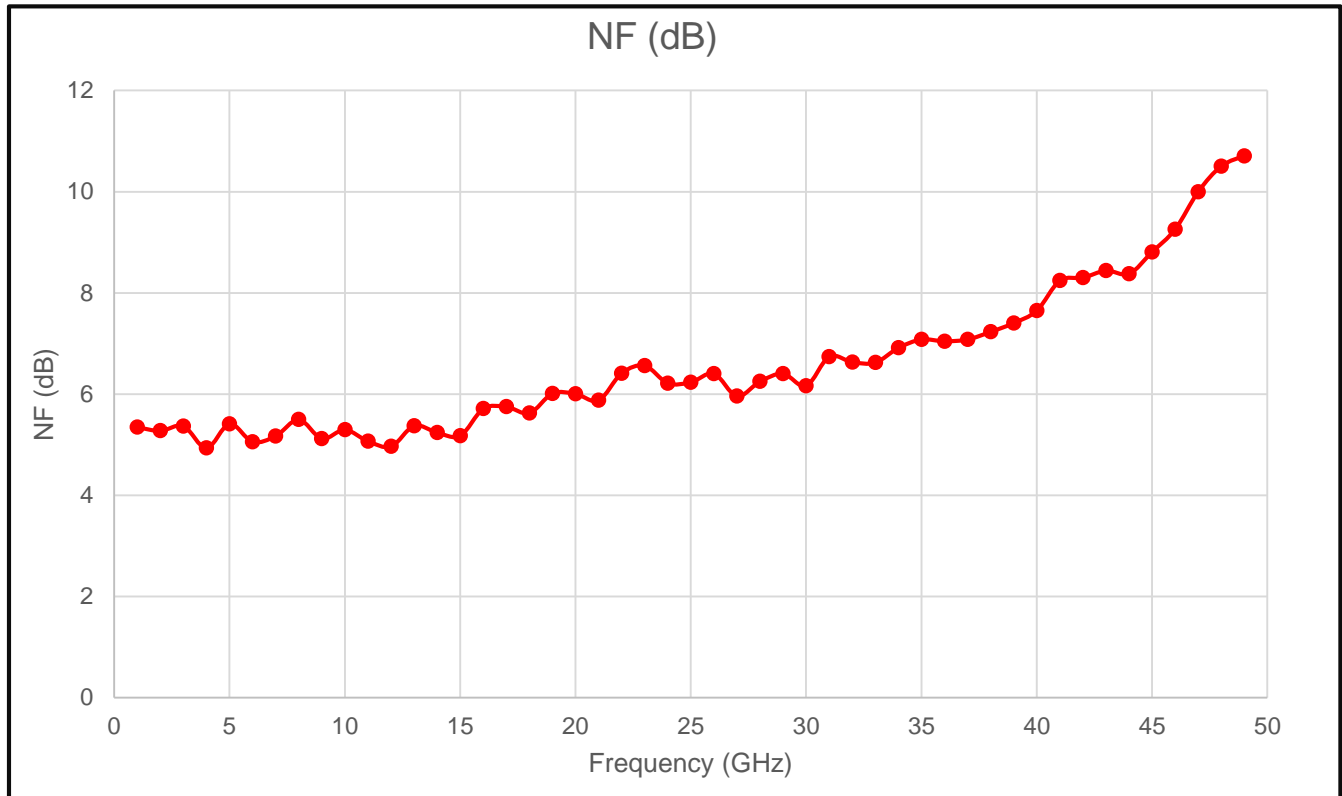

**Ultra Wide Band Low Noise Amplifier 0.01 - 45GHz**




# RF-LAMBDA

The power beyond expectations

RLNA00M45GA

## Outline Drawing:

All Dimensions in mm [inches]

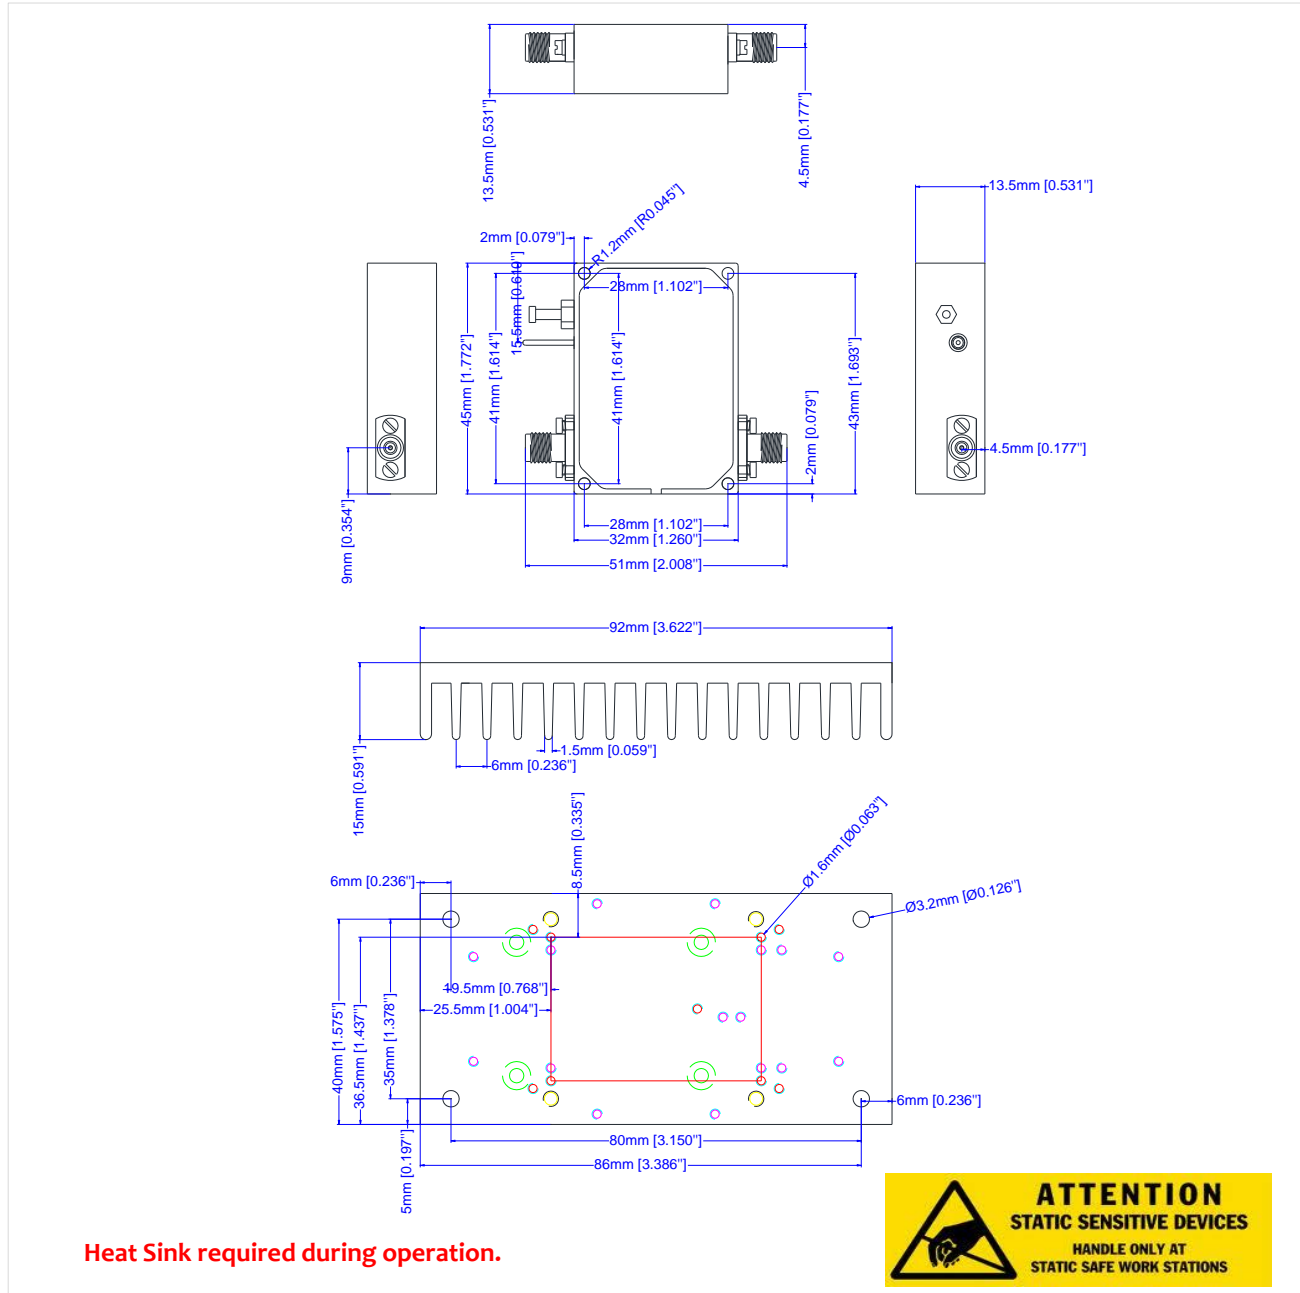

## Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.