

SPA-1-2P5-50 Solid State Power Amplifier

(1GHz - 2.5GHz, 50W)

Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protection
- Optional overdrive protection
- CE, RoHS certification



Overview

Saluki SPA-1-2P5-50 is a solid-state RF power amplifier with an output frequency of 1GHz to 2.5GHz and an output power of 50W. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

Technical Specifications


SPA-1-2P5-50			
Frequency Range	1GHz - 2.5GHz	Input Power	0dBm (max.)
Output Power	50W (min.)	Harmonic	-10dBc (typ.)
P3dB Output Power	15W (min.)	Background Noise	-40dBm/MHz (max.)
Gain	55dB (min.)	Spurious	-60dBc (max.)
Gain Flatness	± 3dB (max.)	Input VSWR	1.5:1 (typ.)
Adjustable Gain	20dB (max.)	Impedance	50 ohm

SPA-1-2P5-50 Solid State Power Amplifier

(1GHz - 2.5GHz, 50W)

Input Port	SMA (female)	Output Port	SMA (female)
Communication Interface	RS485, LAN	Power Supply	AC 220V±10%, 50/60Hz
Dimension	19", 3U	Cooling Type	Air cooling
Operating Temperature	0 - 50°C		

Outline Structure

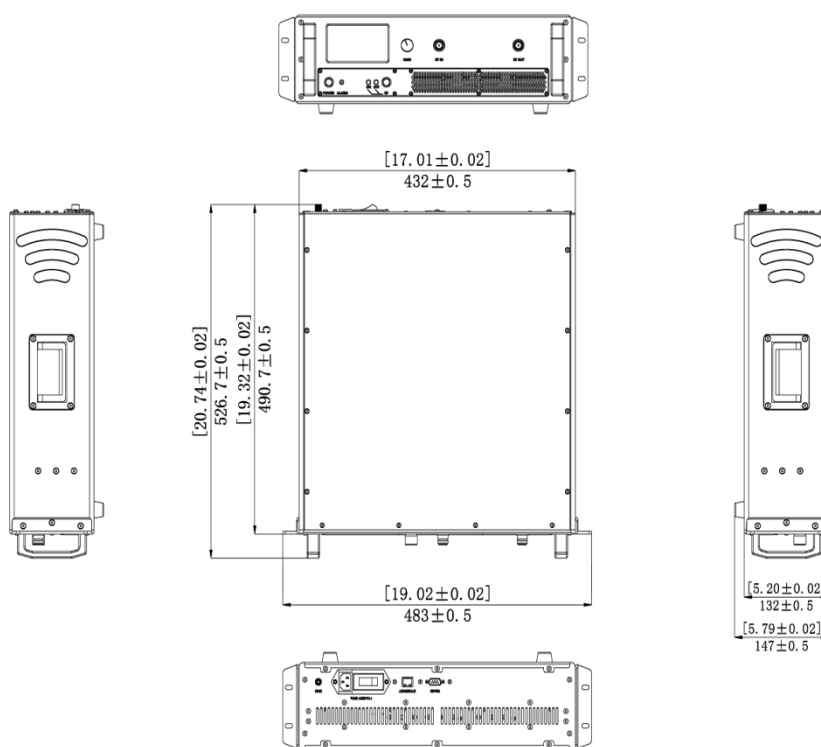

Options

Module No.	Item
001	Overdrive protection
002	GPIB interface

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.