QWCA-D110-S

WRD-110 to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	11~26.5GHz
VSWR:	1.25 max.

Mechanical

Coax Connectors:	SMA
Waveguide Size:	WRD-110
Flange:	FPWRD110
Material:	Aluminium

How To Order

QWCA-D110-X-Y-Z

X : Connector type.

Y : Configuration type.

Z : Flange type if applicable.

Connector naming rules:
S - SMA Male (Outline A)
SF - SMA Female (Outline A)

Configuration naming rules:
E - End launch
R - Right angle (Outline A)

Flange naming rules:
8 - FPWRD (Outline A)

Examples:
To order a waveguide to coax adapter, WR-D110 to SMA female, right angle, FPWRD, specify QWCA-D110-SF-R-8.

Customization is available upon request.

Environmental

Operating Temperature:	-70~+165℃

Outline Drawings

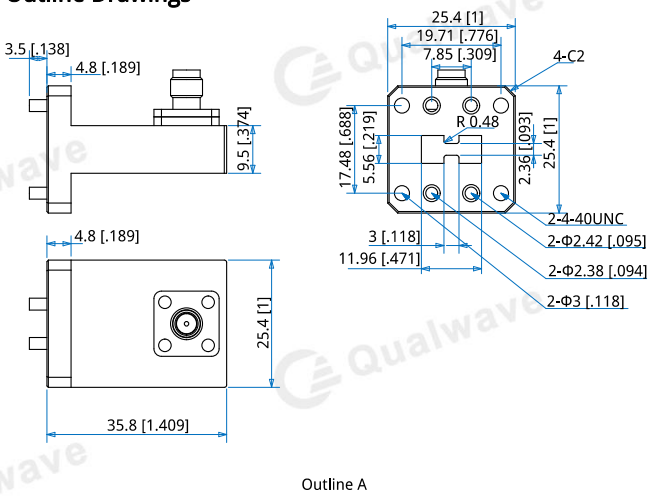

Outline A

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]