

QPD3-100-800-1-S

3-Way, 0.1~0.8GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.1~0.8GHz
Insertion Loss:	1.5dB max.
VSWR:	1.35 max.
Isolation:	20dB min.
Amplitude Balance:	±0.4dB
Phase Balance:	±5°
Impedance:	50Ω
Power @SUM Port:	1W max. as divider 1W max. as combiner

Mechanical


Size ^{*1} :	38.1*25.4*10mm 1.5*1*0.394in
Connectors:	SMA Female
Mounting:	2-M2, depth 8mm

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

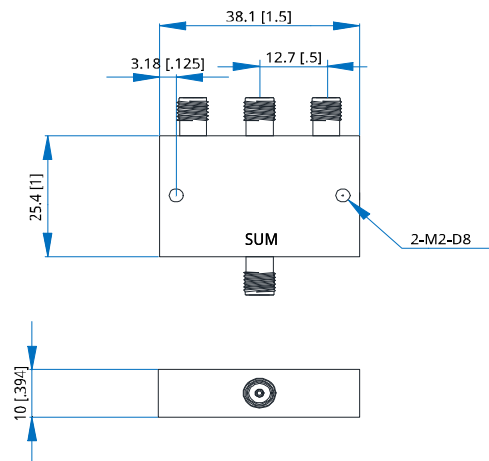

Unit: mm [in]
 Tolerance: ±0.3mm [±0.02in]

How To Order

QPD3-100-800-1-S

Customization is available upon request.