

# SPA-2P5-7P5-40 Solid State Power Amplifier

(2.5GHz - 7.5GHz, 40W)

## Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protection
- Optional overdrive protection
- CE, RoHS certification



## Overview

Saluki SPA-2P5-7P5-40 is a solid-state RF power amplifier with an output frequency of 2.5GHz to 7.5GHz and an output power of 40W. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

## Technical Specifications


| SPA-2P5-7P5-40    |                 |             |               |
|-------------------|-----------------|-------------|---------------|
| Frequency Range   | 2.5GHz - 7.5GHz | Input Power | 0dBm (max.)   |
| Output Power      | 40W (min.)      | Harmonic    | -10dBc (typ.) |
| P1dB Output Power | 10W (min.)      | Spurious    | -60dBc (max.) |
| Gain              | 46dB (min.)     | Input VSWR  | 2:1 (max.)    |
| Gain Flatness     | ± 3dB (max.)    | Impedance   | 50 ohm        |
| Adjustable Gain   | 20dB (max.)     | Input Port  | SMA (female)  |

# SPA-2P5-7P5-40 Solid State Power Amplifier

(2.5GHz - 7.5GHz, 40W)


|                                |                  |                              |                         |
|--------------------------------|------------------|------------------------------|-------------------------|
| <b>Output Port</b>             | Type- N (female) | <b>Cooling Type</b>          | Air cooling             |
| <b>Communication Interface</b> | RS485, LAN       | <b>Power Supply</b>          | AC 220V±10%,<br>50/60Hz |
| <b>Dimension</b>               | 19", 3U          | <b>Operating Temperature</b> | 0 - 50°C                |

## Outline Structure

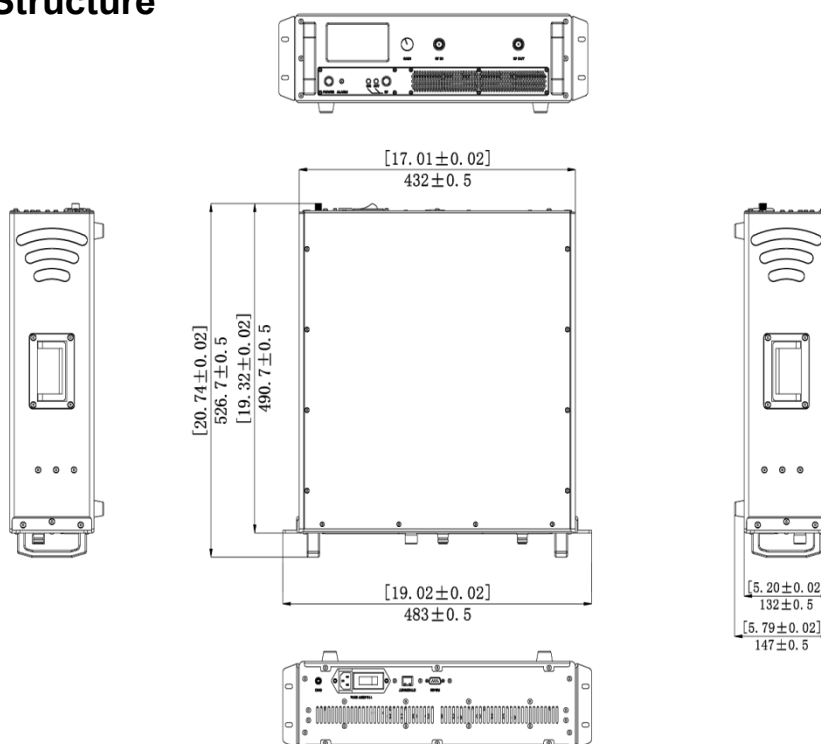

## Options

| Module No. | Item                 |
|------------|----------------------|
| 001        | Overdrive protection |
| 002        | GPIB interface       |

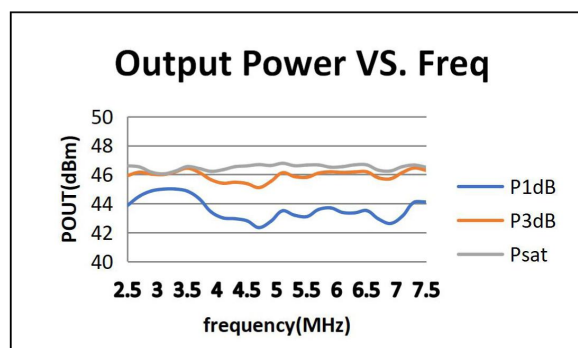

*Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.*