

QWCA-229-TF-R-2-A

WR-229 to TNC Female, Right angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 3.22~4.9GHz
VSWR: 1.2 max.

Mechanical


RF Connectors: TNC Female
Waveguide Size: WR-229
Flange: FDP40
Material: Copper

How To Order

[QWCA-229-TF-R-2-A](#)

Customization is available upon request.

Outline Drawings

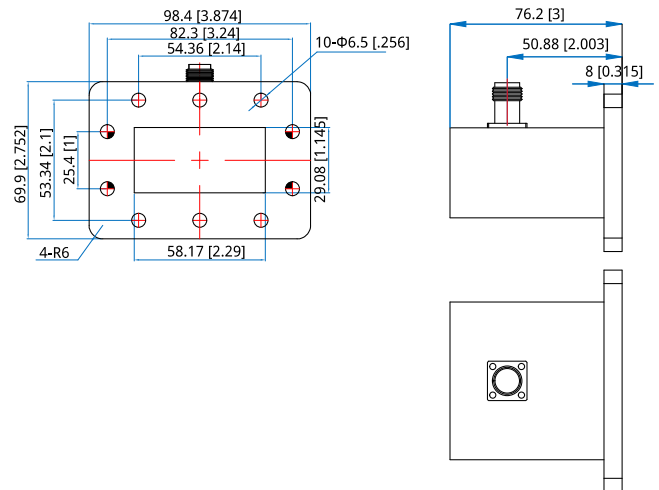

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]