

6-18GHz/50Watt/Module

Model Number: KB60180M47C

The model KB60180M47C is a multi-octave high power amplifier operating between 6 GHz and 18 GHz and offering a wide dynamic Range with 50 Watts typical saturated power. The employment of gallium nitride (GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

FEATURES:

- Small Size and light weight
- Instantaneous ultra-broadband
- 50Ohms input and Output matched
- Built-in control and protection circuits

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	6000		18000	MHz
RF Output Power @Pin=0dBm	PSAT		50		Watt
Power Gain @PSAT	Gp		48		dB
Power Gain Flatness	Δ Gp		±2		dB
Input Return Loss	S11		-10		dB
Harmonics 2 nd @40W	H			-12	dBc
Spurious Signals	Spur		-55		dBc
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	26	28	30	Volt
DC Current @50W	IDD		18	21	Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	180x120x25[7.08x4.72x0.98]	mm [inch]	Maximum
Weight	1.3 [2.87]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	N, Female		
DC Interface Connector	J29A-25ZKP		
Cooling	External Heatsink (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		55	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)	5		95	%	

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

6-18GHz/50Watt/Module

Model Number: KB60180M47C


Absolute Maximum Rating

Input RF drive level without	+5dBm	Maximum
Load VSWR @ POUT =30W	3:1 @ all load phase & amplitude continuous More than 4:1 may cause PA damage	
Over Temperature	80°C @ heatsink	

DC INTERFACE CONNECTOR

1-9	VDD	28 V
10-19	GND	Ground
20	ENABLE	Amplifier Enable: TTL Logic High (3.3V)
21	CURRENT SENSE	Current Monitoring
22	CURRENT ALARM	TTL Logic High (3.3V)
23	TEMP ALARM	TTL Logic High (3.3V) when temperature was exceed limit value
24-25	GND	Ground

OUTLINE DRAWING [All dimensions in mm]

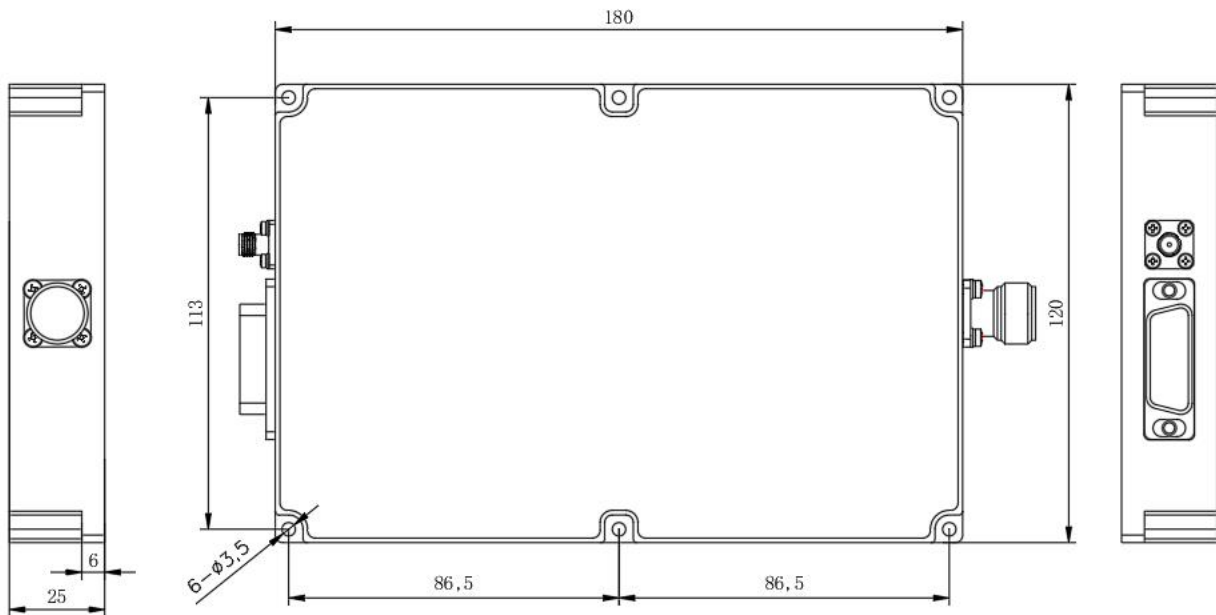

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

6-18GHz/50Watt/Module

Model Number: KB60180M47C

TYPICAL PERFORMANCE PLOTS (For reference only)

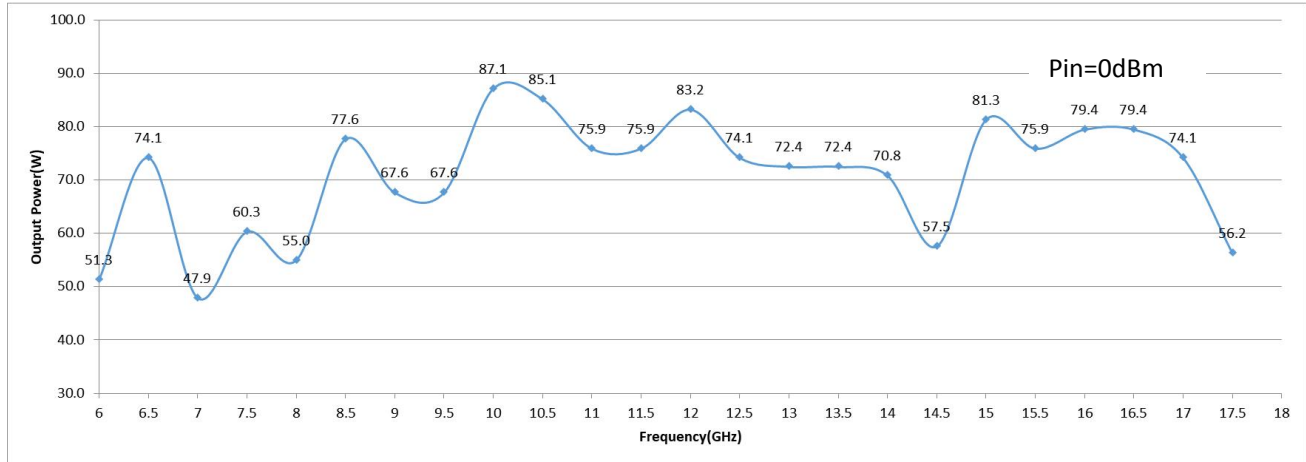

Note:

- 1. Adequate heatsink required.
- 2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with KeyLink sales team if you have any question.

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice