QWCA-D250-N

WRD-250 to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	2.6~7.8GHz
VSWR:	1.4 max.
Insertion loss:	0.4dB max.

Mechanical

Coax Connectors:	N
Waveguide Size:	WRD-250
Flange:	FPWRD250
Material:	Aluminium

How To Order

QWCA-D250-X-Y-Z

X : Connector type.

Y : Configuration type.

Z : Flange type if applicable.

Connector naming rules:
N - N Male (Outline A)
NF - N Female (Outline A)

Configuration naming rules:
E - End launch
R - Right angle (Outline A)

Flange naming rules:
8 - FPWRD (Outline A)

Examples:
To order a waveguide to coax adapter, WR-D250 to N female, right angle, FPWRD, specify QWCA-D250-NF-R-8.

Customization is available upon request.

Environmental

Operating Temperature:	-70~+165°C

Outline Drawings

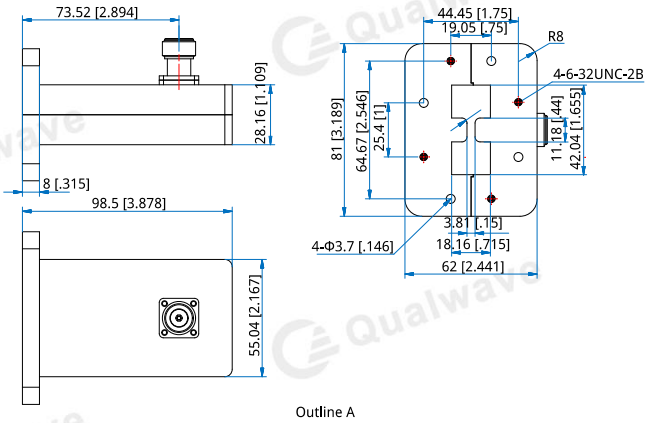

Outline A

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]