

# SPA-9P9-10P1-100 Solid State Power Amplifier

(9.9GHz - 10.1GHz, 100W)

## Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protection
- Optional overdrive protection
- CE, RoHS certification



## Overview

Saluki SPA-9P9-10P1-100 is a solid-state RF power amplifier with an output frequency of 9.9GHz to 10.1GHz and an output power of 100W. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

## Technical Specifications


SPA-9P9-10P1-100			
Frequency Range	9.9GHz - 10.1GHz	Input Power	0dBm (max.)
Output Power	100W (min.)	Harmonic	-20dBc (typ.)
Gain	50dB (min.)	Background Noise	-40dBm/MHz (max.)
Gain Flatness	± 1dB (max.)	Spurious	-60dBc (max.)
Adjustable Gain	15dB (max.)	Input VSWR	2:1 (typ.)
Impedance	50 ohm	Input Port	Type- N (female)

# SPA-9P9-10P1-100 Solid State Power Amplifier

(9.9GHz - 10.1GHz, 100W)

<b>Output Port</b>	Type- N (female)	<b>Cooling Type</b>	Air cooling
<b>Communication Interface</b>	RS485, LAN	<b>Power Supply</b>	AC 220V±10%, 50/60Hz
<b>Dimension</b>	19", 3U	<b>Operating Temperature</b>	0 - 50°C

## Outline Structure

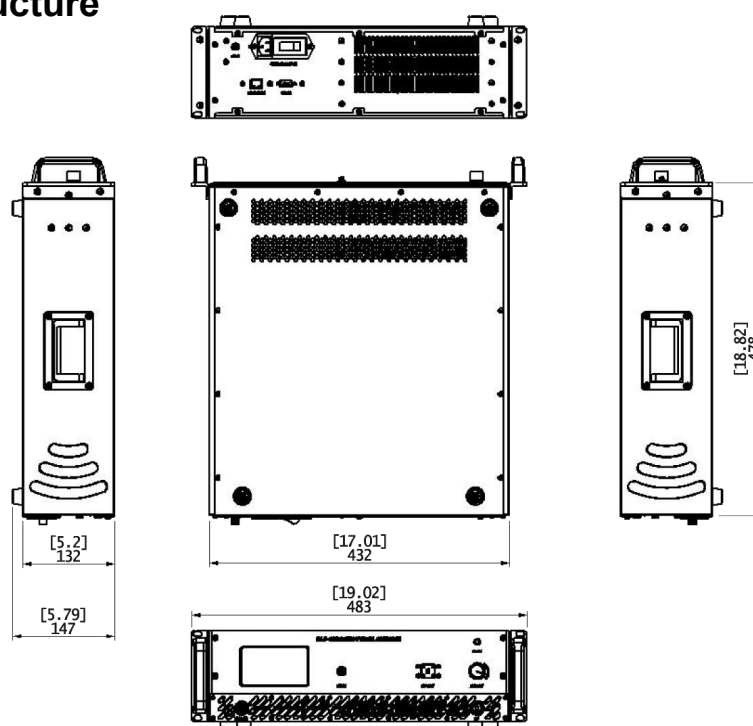

## Options

Module No.	Item
001	Overdrive protection
002	GPIB interface

*Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.*